

PEM Fuel Cell System Manufacturing Cost Analysis for Automotive Applications



AustinPower
Engineering

Yong Yang
President


November 17, 2015

Austin Power Engineering LLC
1 Cameron St
Wellesley, MA 02482
USA

www.AUSTINPOWERENG.com
yang.yong@austinpowereng.com

© 2015 Austin Power Engineering LLC

Have been working on fuel cell manufacturing cost modeling for US DOE, UK Carbon Trust, and commercial clients since 2002.

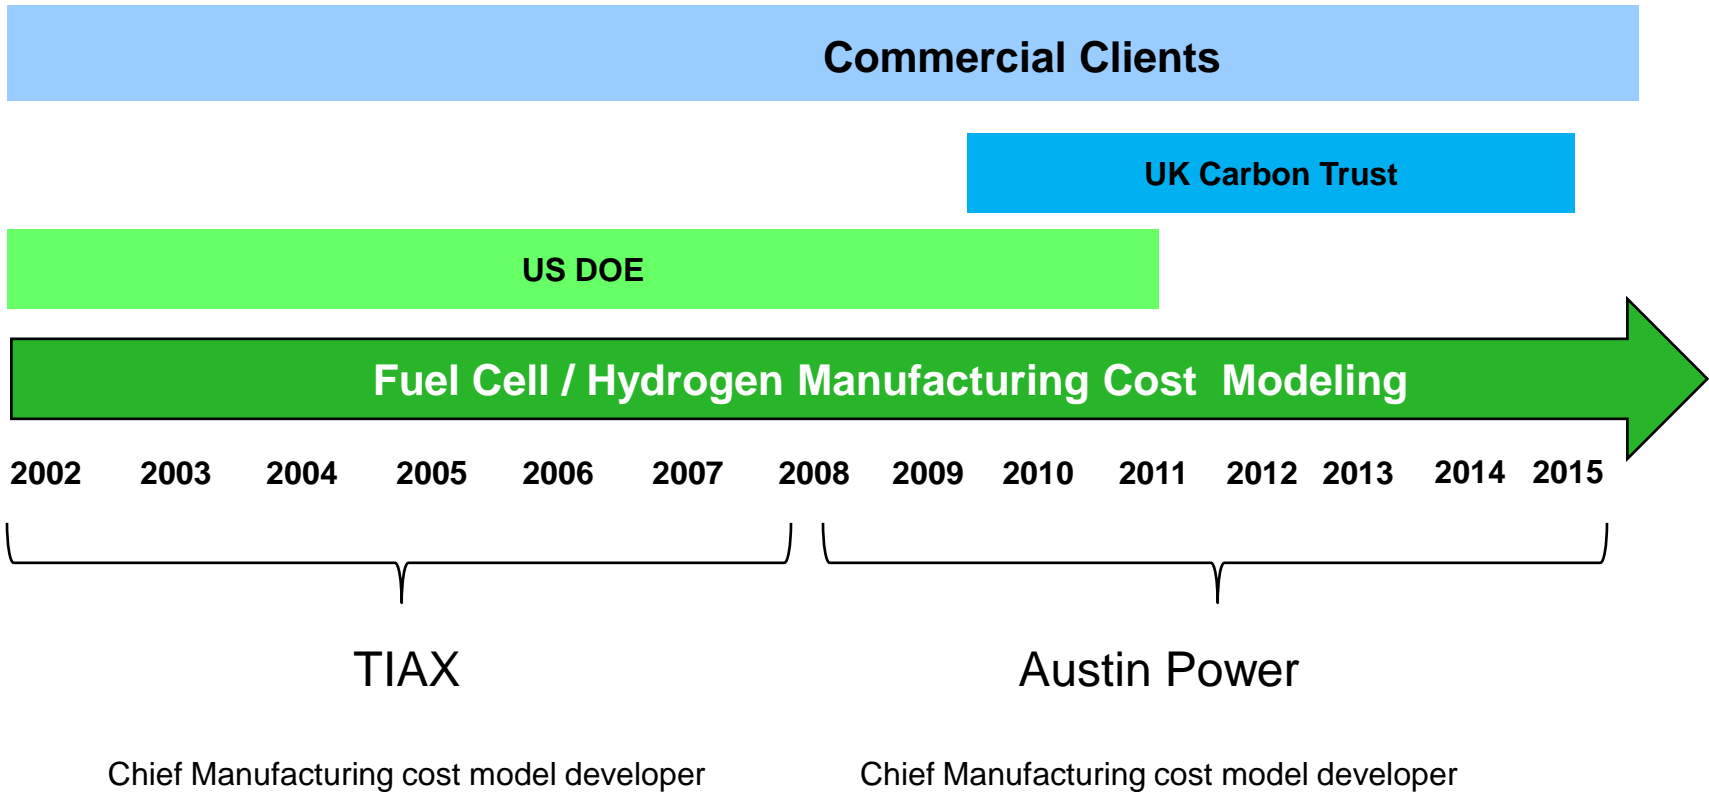

Approach Manufacturing Cost Modeling Methodology

This approach has been used successfully for estimating the cost of various technologies for commercial clients and the DOE.

Technology Assessment

- Literature research
- Definition of system and component diagrams
- Size components
- Develop bill-of-materials (BOM)

Manufacturing Cost Model





- Define system value chain
- Quote off-shelf parts and materials
- Select materials
- Develop processes
- Assembly bottom-up cost model
- Develop baseline costs

Scenario Analyses

- Technology scenarios
- Sensitivity analysis
- Economies of Scale
- Supply chain & manufacturing system optimization
- Life cycle cost analysis


Verification & Validation

- Cost model internal verification reviews
- Discussion with technical developers
- Presentations to project and industrial partners
- Audit by independent reviewers

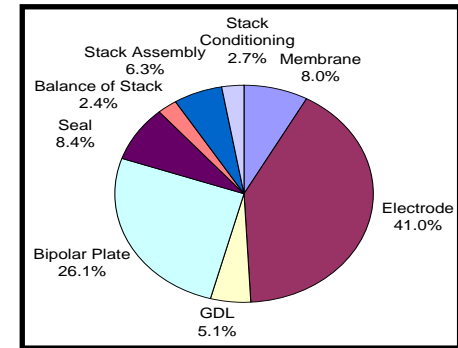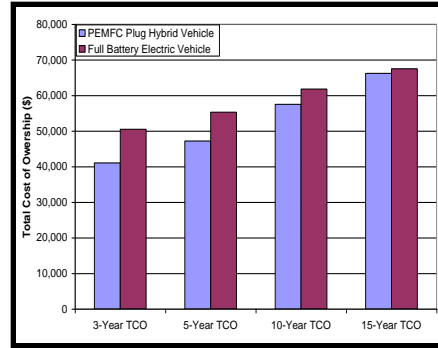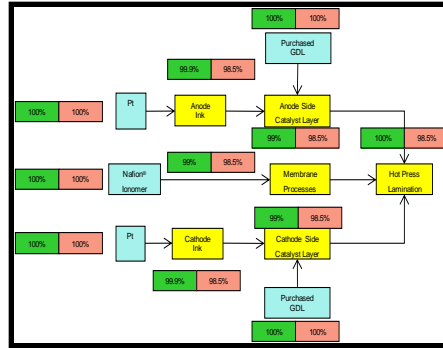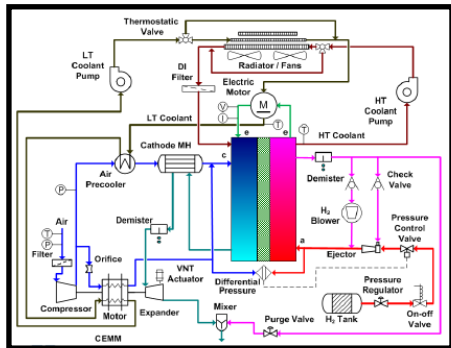


Combining performance and cost model will easily generate cost results, even when varying the design inputs.

Conceptual Design




- ◆ System layout and equipment requirements

Site Plans




- ◆ Safety equipment, site prep, land costs

Process Simulation




- ◆ Energy requirements
- ◆ Equipment size/ specs

Capital Cost Estimates




- ◆ High and low volume equipment costs

Process Cost Calcs




- ◆ Process cost
- ◆ Material cost

Product Costs



- ◆ Product cost (capital, O&M, etc.)

Conduct a bottom-up manufacturing cost analysis of a 80kW light-duty vehicle fuel cell power system which includes a fuel cell system, a hydrogen storage tank , and a hybrid NIMH battery pack.

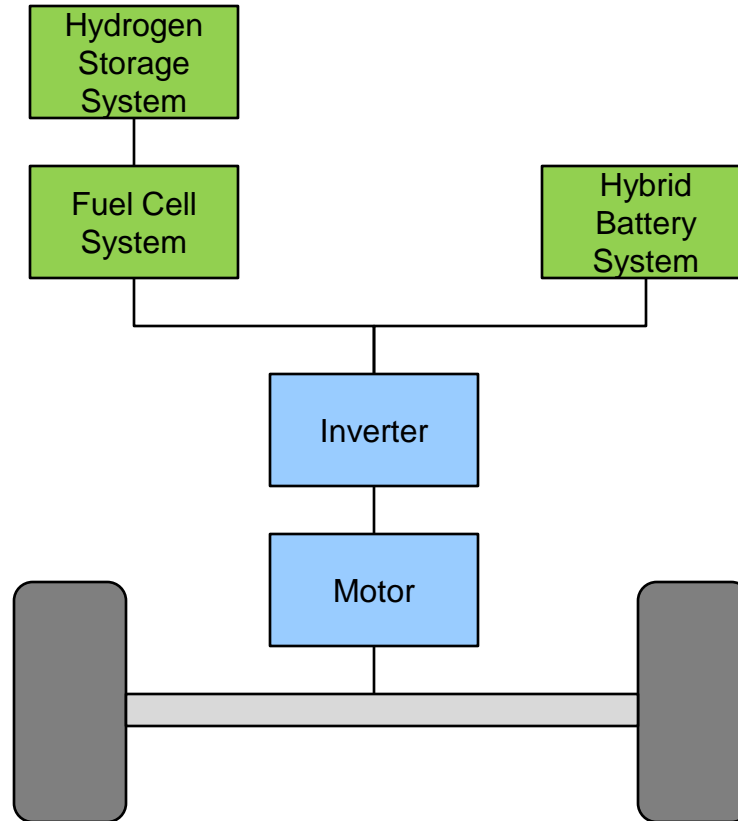


Not included in the analysis

Included in the analysis

We published various fuel cell vehicle powertrain configurations manufacturing cost analysis in the past years.

Specifications	2012 FCS	2013 FCS	2014 FCS	2015 FCS
PEM fuel cell system	•65 kWe	•80 kWe	•80 kWe	•80 kWe
On-board hydrogen storage	-Compressed H2 -5,000 psi -Single tank -5.6 kg usable H2	-Compressed H2 -5,000 psi -Single tank -5.6 kg usable H2	-Cryo-compressed H2 -Single tank -10 kg usable H2	-Compressed H2 -10,000 psi -Two tanks -5.6 kg usable H2
Hybrid battery pack	-Li-ion battery -16 kWh	-Li-ion battery -1.2 kWh	-Li-ion battery -1.2 kWh	-NiMH battery -1.6 kWh
Comments	Plug-in hybrid fuel cell vehicle	hybrid fuel cell vehicle	hybrid fuel cell vehicle	hybrid fuel cell vehicle

The 80 kW_{net} direct hydrogen PEM fuel cell system configuration is referenced in previous and current studies conducted by Argon National Laboratory (ANL).

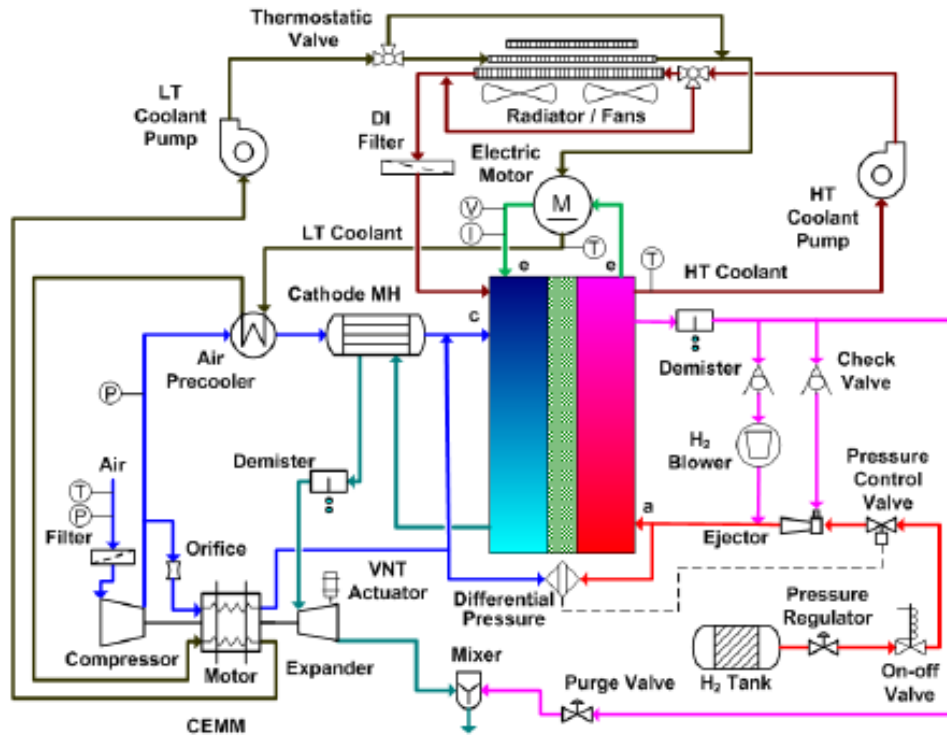

80 kW_{net} Fuel Cell System Schematic¹

1. R. K. Ahluwalia, X. Wang, "Fuel cells systems analysis," 2013 DOE Hydrogen and Fuel Cells Program Review, Washington DC, May13-16, 2013.

Key Parameters

Stack

- 3M NSTFC MEA
- 25 μm supported membrane
- 0.153 mg/cm² Pt
- Power density: 834mW/cm²
- Metal bipolar plates
- Non-woven carbon fiber GDL

Air Management

- Honeywell type compressor / expander
- Air-cooled motor / Air-foil bearing

Water Management

- Cathode planar membrane humidifier with pre-cooler
- No anode humidifier

Thermal Management

- Micro-channel HX

Fuel Management

- Parallel ejectors

Based on ANL's stack performance analysis, we make the following system and material assumptions for the cost estimation.

Stack Components	Unit	2012	2013	2014	2015
Production volume	systems/year	500,000	500,000	500,000	500,000
Stacks' net power	kW	65	80	80	80
Stacks' gross power	kW	72	88	89.4	88
Cell power density	mW/cm ²	930	984	692	834
Peak stack temp.	Degree C	90	87	92.3	100
Peak stack pressure	Bar	2.5	2.5	2.5	2.5
Cell Voltage	Volt	0.67	0.676	0.695	0.67
System Voltage (rated power)	Volt	300	300	300	300
Platinum price	\$/tr.oz.	\$1,475	\$1,100	\$1,100	\$2,000
Pt loading	mg/cm ²	0.15	0.196	0.153	0.153
Membrane type		Reinforced Nafion®	Reinforced 3M PFSA	Reinforced 3M PFSA	Reinforced 3M PFSA
Membrane thickness	micro meter	20	25	25	25
GDL layer		None-woven carbon paper	None-woven carbon paper	None-woven carbon paper	None-woven carbon paper
GDL thickness	micro meter	185	185	185	185
MPL layer thickness	micro meter	40	40	40	40
Bipolar plate type		76Fe-20Cr-4V with nitridation surface treatment	76Fe-20Cr-4V with nitridation surface treatment	SS316L with Treadstone Coating	SS316L with Treadstone Coating
Bipolar plate base material Thickness	micro meter	100	100	100	100
Seal material		Viton®	Viton®	Viton®	Viton®


We use Pt price at \$2,000/troz which is the similar to highest Pt price in the history.



The 80 kW_{net} PEM fuel cell stack costs approximately \$30/kW. Electrodes, bipolar plates, and seals are the top three cost drivers.

Stack Components	2015 Stack Cost (\$/kW)	Comments
Membrane	\$1.06	PFSA ionomer (\$75/kg)
Electrode	\$15.37	Pt (\$2,000/troz)
GDL	\$1.50	No-Woven carbon paper
Bipolar Plate	\$7.16	Treadstone Coating metallic plates
Seal	\$2.14	Viton
BOS	\$0.58	Manifold, end plates, current collectors, insulators, tie bolts, etc.
Final Assembly	\$1.47	Robotic assembly
Stack Conditioning	0.60	2 Hours
Total stack²	\$29.88	

80 kW_{net} PEM Fuel Cell Stack Cost (\$30/kW_{net})

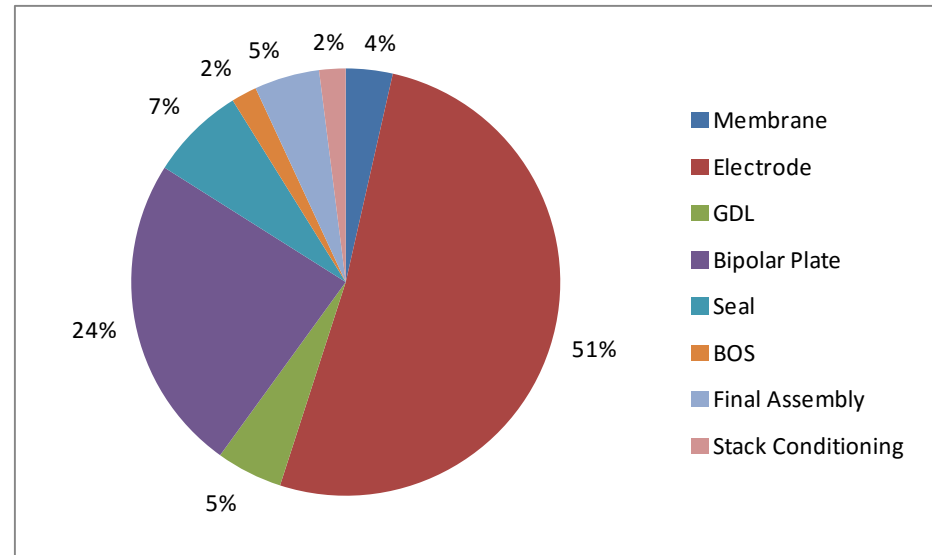


1. Stack assembly cost category included MEA assembly and stack QC; QC included visual inspection, and leak tests for fuel, air, and coolant loops.
2. Results may not appear to calculate due to rounding of the component cost results.

The 80 kW_{net} PEM fuel cell system costs \$59/kW at the mass production volume. Stack, air management, and thermal management are the top three cost drivers.

System Components	2015 System Cost (\$/kW)	Comments
Stack	\$29.9	
Water management	\$1.6	Cathode side humidifier, etc.
Thermal management	\$5.0	HX, coolant pump, etc.
Air management	\$10.1	CEM, etc.
Fuel management	\$4.8	H2 pump, etc.
Balance of system	\$3.9	Sensors, controls, wire harness, piping, etc.
System assembly	\$3.9	
Total system ^{1, 2}	\$59.3	


80 kW_{net} PEM Fuel Cell System Cost (\$4,742/system)

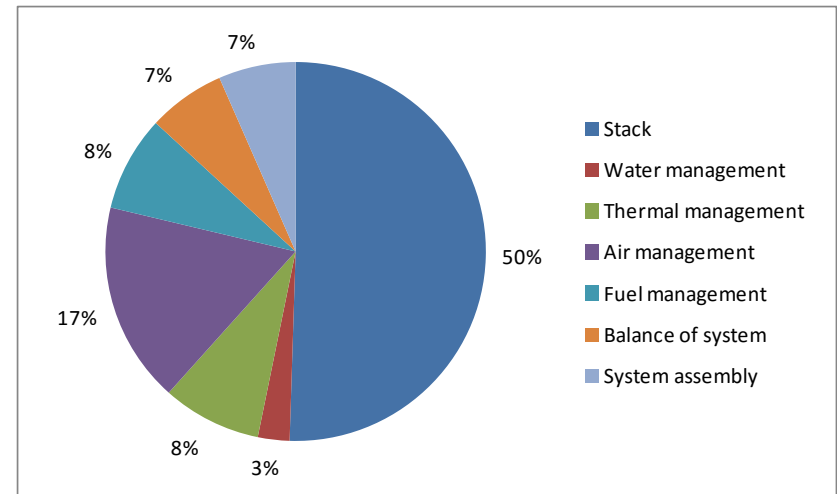

1. Assumed 15% markup to the automotive OEM for BOP components
 2. Results may not appear to calculate due to rounding of the component cost results.

Compressed H2 Storage System Configurations

The 700 bar compressed hydrogen tank design is referenced in studies TIAX conducted on hydrogen storage¹.

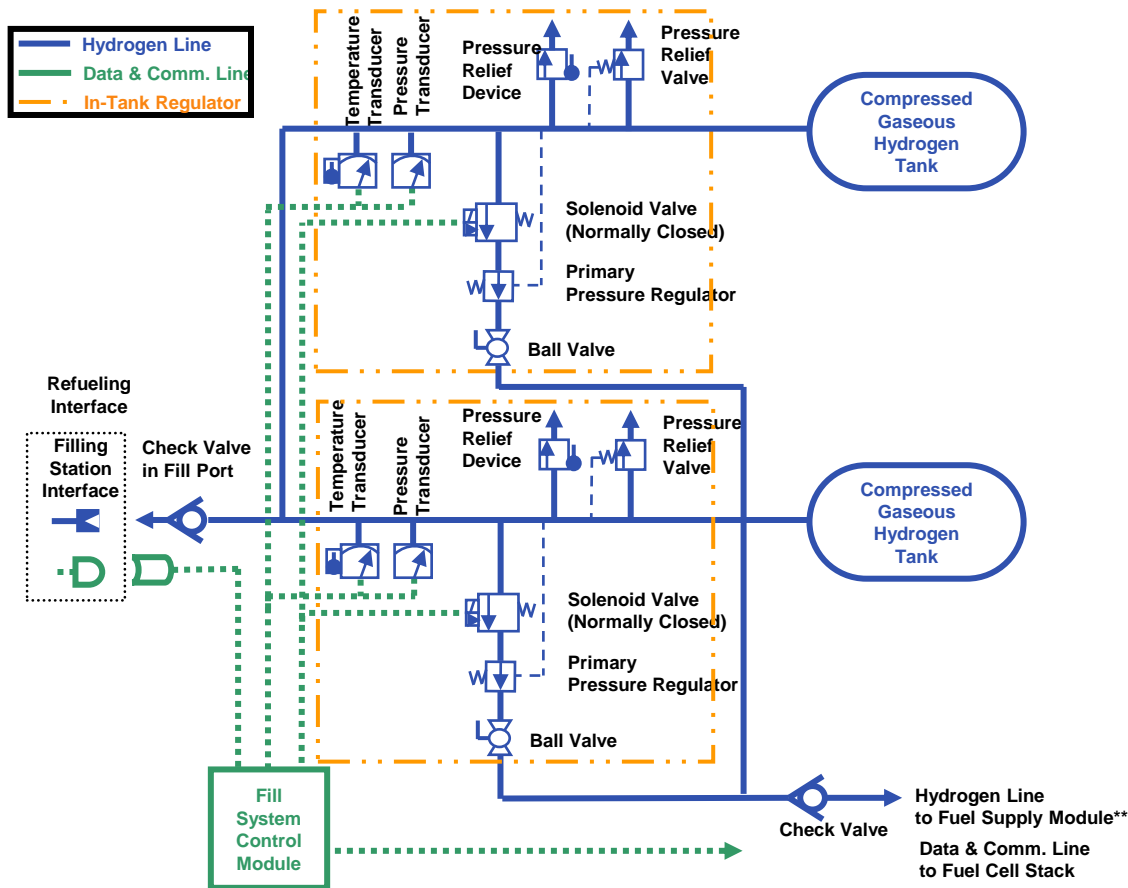

700 bar Compressed Hydrogen Storage System Schematic^{1, 2}

Key Parameters

System Volume

- CH₂ storage: 5.6kg usable H₂
- System pressure: 700 bar
- # of tanks: 2

Tank

- Carbon fiber: Toray T700S
- Carbon fiber / resin ratio: 0.68 : 0.32 (weight)
- Translational strength factor: 63%
- Safety factor: 2.25
- Al liner
- Glass fiber projection layer

1. E. Carlson and Y. Yang, "Compressed hydrogen and PEM fuel cell system," Fuel cell tech team freedomCar, Detroit, MI, October 20, 2004.
2. S. Lasher and Y. Yang, "Cost analysis of hydrogen storage systems - Compressed Hydrogen On-Board Assessment – Previous Results and Updates for FreedomCAR Tech Team", January, 2007

Compressed H2 Storage System Specification

Assumptions for the hydrogen storage tank design were based on calculations, literature reviews, and third-party discussions.

Stack Components	Unit	Current System	Comments
Production volume	systems/year	500,000	High Volume
Usable hydrogen	Kg	5.6	
Recoverable H2 in the tank	Kg	6.0	
Tank type		IV	With Al liner
Tank pressure	PSI	10,000	
# of tanks	Per System	2	
Safety factor		2.25	
Tank length/diameter ratio		3:1	
Carbon fiber type		Toray T700S	
Carbon fiber cost	\$/lbs	12	
Carbon fiber vs. resin ratio		0.68:0.32	Weight
Carbon fiber translational Strength factor		63%	
Damage resistant outer layer material		S-Glass	Could be replaced by cheaper E-glass
S-Glass cost	\$/lbs	7	
Impact resistant end dome material		Rigid Foam	
Rigid foam cost	\$/kg	3	
Liner material		Al	


A vertically integrated manufacturing process was assumed for the tank and BOP components.

Major Tank Components

- Aluminum End Boss
- Al liner
- Carbon fiber composite layer
- Glass fiber composite layer
- End domes (rigid foam)

Major BOP Components

- In-tank primary pressure regulator
- Valves & sensors
- Filling interface
- Pressure release devices
- Piping & fitting

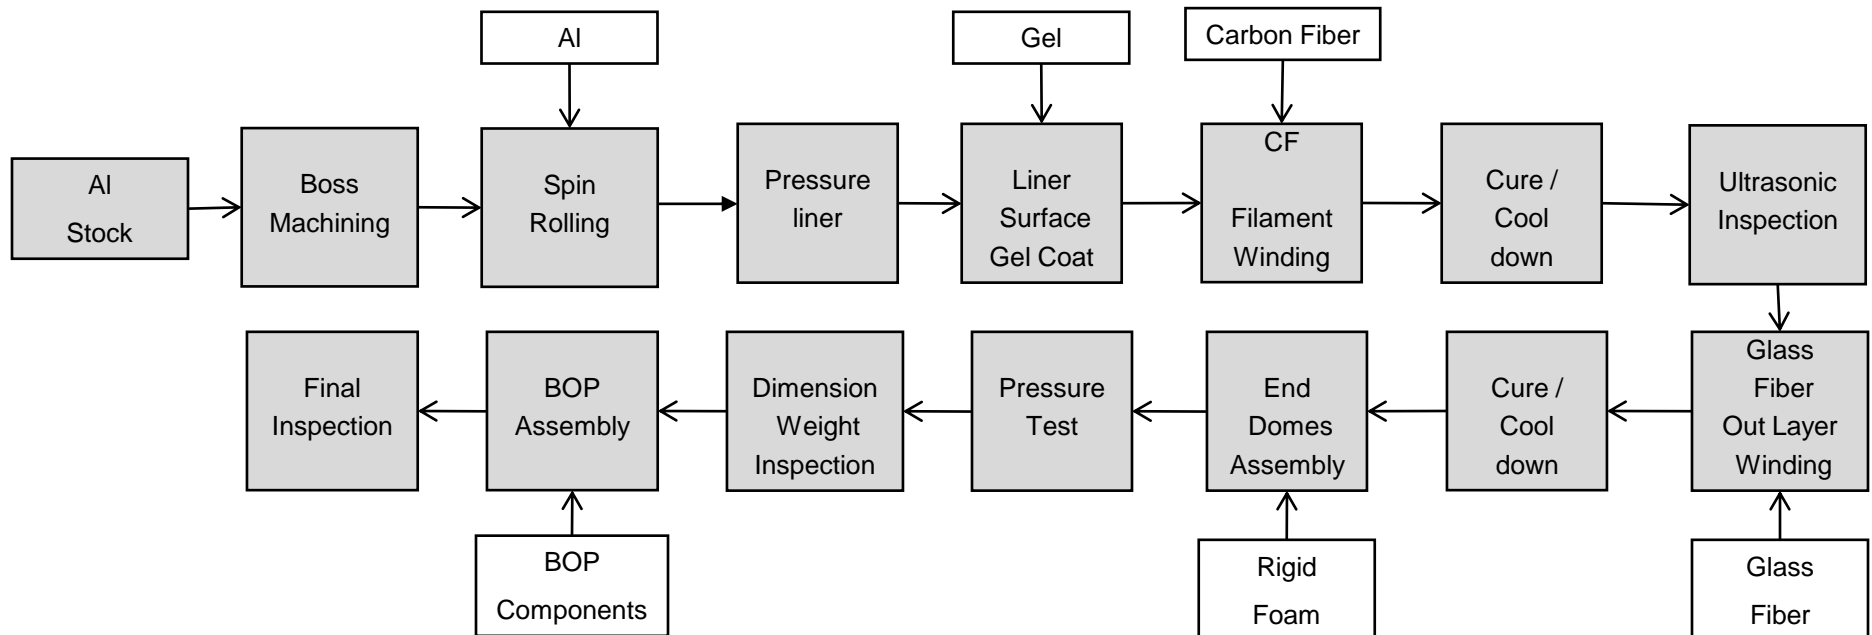


Compressed H2 Storage System Cost

In the 700 bar compressed hydrogen storage system, the carbon fiber composite layers, in-tank regulators, system control valves are the top three cost drivers.

System Components	2015 CH2 Cost (\$/kWh)
Liner	\$ 0.19
Carbon Fiber	\$ 12.47
Glass Fiber	\$ 0.85
Foam	\$ 0.26
Bosses	\$ 0.21
Regulator	\$ 2.68
Fill Port	\$ 0.54
Valves	\$ 1.61
Sensors	\$ 0.64
Pipe&Fitting	\$ 0.47
Assembly	\$ 0.24
Inspections	\$ 0.12
Misc	\$ 0.05
Total	\$ 20.33


CH2 Storage System Cost (\$3,794/system)

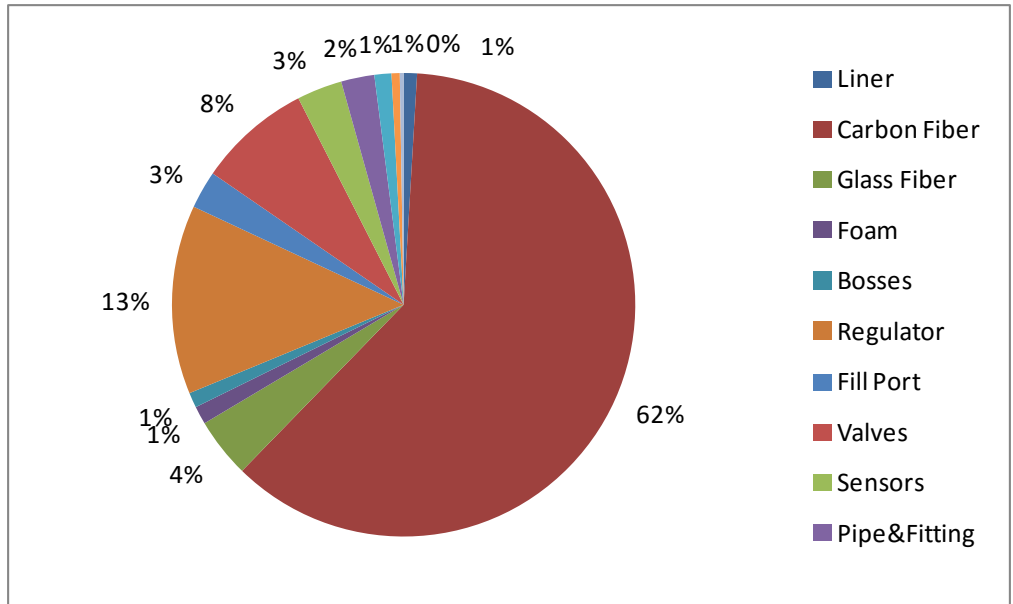

A NiMH battery pack will provide hybridization of a fuel cell vehicle which improves fuel economy as well as having the function as a startup battery. There are 34 6.5Ah-7.2V NiMH battery modules in the battery pack.



Battery Pack

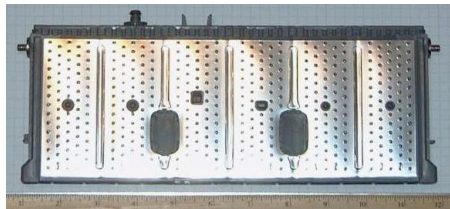

Battery Module


<http://afvsafetytraining.com/erg/Toyota-Camry-HV-2007-11.pdf>

<http://www.peve.jp/en/product/np2/index.html>

Specifications	
Battery pack voltage	245 V
Battery pack dimension	190 x 850 x 495 mm
Battery pack weight	52 kg
Battery pack energy	1.6 kWh
Number of NiMH battery modules in the pack	34
NiMH battery module nominal voltage	7.2 V
NiMH battery module nominal capacity	6.5 Ah
NiMH battery module Output	1,350 W
Anode active material	AB ₅
Cathode active material	Ni(OH) ₂

The hybrid NiMH battery pack costs \$611/kWh. Battery modules, battery management system, and sensors have higher cost contributions.

Cost Category	2015 Pack Cost (\$/kWh)
6.5 Ah modules	\$347
Module stack (w/o) module	\$6
Battery management system	\$91
Sensors, fuses, switches	\$70
Thermal management system	\$28
Enclosure	\$32
Misc.	\$19
Assembly and Testing	\$17
Total (\$/kWh)	\$611

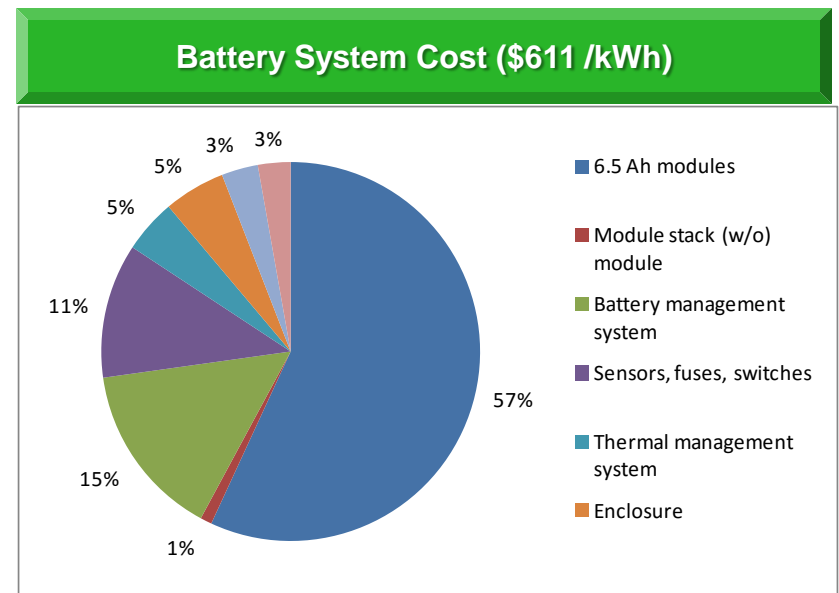

The 1.6 kWh lithium-ion battery system cost \$978 per pack at the mass production volume (500,000 packs/year).

Conclusion

PEM fuel cell system, onboard hydrogen storage, and hybrid battery cost approximately \$10,070 per vehicle.

Cost Category	2012 Pack Cost (\$/pack)	2013 Pack Cost (\$/pack)	2014 Pack Cost (\$/pack)	2015 Pack Cost (\$/pack)
80 kW _e Fuel Cell	\$4,030 ¹	\$4,256	\$4,713	\$4,742
5.6 Kg Useable H2 Storage	\$3,058	\$3,028	\$4,567 ²	\$3,794
Hybrid Battery Pack	\$4,497 ³	\$1,034	\$790	\$978
Total:	\$11,585	\$8,318	\$10,070	\$9,514
Comments	FC-PHEV	FC-HEV	FC-HEV	FC-HEV

1. 65kW_e fuel cell system
2. 10 kg useable hydrogen.
3. 16 kWh li-ion battery pack

- The mass production manufacturing cost of the 80 kW_{net} PEMFC stack is estimated to be \$30/kW.
- The mass production OEM cost of the 80 kW_{net} PEMFC system is estimated to be \$59/kW
- The 5.6 kg 2-tank compressed on-board hydrogen storage system is estimated to be \$20/kWh at the mass production.
- The hybrid NiMH battery (1.6kWh) costs \$978 per pack or \$611/kWh.

The PEM fuel cell middle size passenger vehicle purchase price is approximately \$27,089 at the mass production volume.

Component Category		PEMFC Hybrid (\$/unit)	Comments
Glider	Glider	7,000	Mid-size passenger vehicle
Power Chain	PEMFC	4,742	Bottom-up costing
	H2 storage	3,794	Bottom-up costing
	Battery system	978	Bottom-up costing
	Traction motor¹	1,200	Motor + controller + transmission
	Power electric¹	840	Battery charger, main inverter, DC/DC converter, auxiliary inverter, etc
	<i>Power chain sub-total</i>	11,554	
Total vehicle manufacturing cost		18,554	
Markup²		46%	Corporation cost & profit, dealer cost, shipping cost, tax
Purchase price for consumer		27,089	

1. The DOE advanced power electronics & electric motors (APEEM) team reported the power electronics cost \$7/kW and the motor cost \$10/kW in 2012.

2. Automobile Industry Retail Price Equivalent and Indirect Cost Multipliers, EPA, 2009

Conclusions Cost Comparing with Battery

Comparing a PEM FC vehicle with a middle size passenger electric vehicle which both have a drive range approximately 250 miles.

EV Battery Pack Cost	80kWh EV Battery Pack Cost (\$)	80kW PEMFC System* Cost (\$)
\$100 /kWh	\$8,000	\$9,514
\$150 /kWh	\$12,000	
\$200 /kWh	\$16,000	
\$250 /kWh	\$20,000	
\$300 /kWh	\$24,000	

	Energy (kWh)	Total Energy (kWh)	Cost (\$/kWh)
EV battery	80kWh	80 kWh	\$100~300/kWh
PEMFC System* (Chemical Energy + Electric Energy)	185 kWh (Chemical) 1.6 kWh (Electric)	186.6 kWh	\$51 /kWh
PEMFC System* (Converted Chemical Energy** + Electric Energy)	92.5 kWh (Converted Chemical) 1.6 kWh (Electric)	94.1 kWh	\$101 /kWh

- * Includes an 80kWe PEMFC, a CH₂ storage tank, and a 1.6 kWh NiMH battery
- ** Assume the hydrogen to electricity efficiency is 50%

Thank You!

Contact: Yong Yang

Austin Power Engineering LLC

1 Cameron St,
Wellesley, MA 02482

781-239-9988

978-263-0397

yang.yong@austinpowereng.com

www.austinpowereng.com