



# Direct Hydrogen PEMFC Manufacturing Cost Estimation for Automotive Applications

*Project ID # FCP36*

**Poster Session at: DOE Hydrogen Program  
Annual Merit Review**

*Crystal Gateway Marriott, Arlington, VA  
May 16–19, 2006*

*Presented by:*

**Eric J. Carlson**

May 17, 2006

**TIAX LLC**  
15 Acorn Park  
Cambridge, MA  
02140-2390

[www.TIAXLLC.com](http://www.TIAXLLC.com)

© 2006 TIAX LLC

*This presentation does not contain any proprietary or confidential information*

## Timeline

- ◆ **Start date: Feb 2006**
- ◆ **Base period: Feb 2008**
- ◆ **Option period: Feb 2011**

## Barriers

- ◆ **Barriers addressed**

- » **A. Cost**

	Cost Targets* (\$/kW)		
	2005	2010	2015
Fuel Cell System	125	45	30
Fuel Cell Stack	65	30	20

\* Manufactured at volume of 500,000 per year.

## Budget

- ◆ **Total project funding**
  - » **Base Period = \$343K**
  - » **With Options = \$1,484K**
  - » **No cost share**
- ◆ **FY06 = \$100K obligated**

## Partners

- ◆ **Collaborate with ANL on system configuration and modeling**
- ◆ **Feedback from: Fuel Cell Tech Team, Developers**


## Objectives and Timeline

	Objectives
Overall	<ul style="list-style-type: none"><li>◆ The project objective is to provide technical support services to the DOE for cost estimation/analysis for Direct Hydrogen PEMFC systems for automotive applications</li></ul>
2005–2006	<ul style="list-style-type: none"><li>◆ The focus over the next 12 months will be on developing system costs as a function of production volume, i.e., to understand the economies of scale for fuel cell materials, stacks, and balance-of-plant components</li><li>◆ Cost of systems meeting 2010 and 2015 technical targets</li></ul>
2006–2011	<ul style="list-style-type: none"><li>◆ Annual up-dates of high volume cost projection</li><li>◆ Specific Analysis topics including cost implications of<ul style="list-style-type: none"><li>» Ambient versus pressurized operation</li><li>» High temperature, low humidity operation</li><li>» Lower temperature, low RH hydrocarbon membrane</li><li>» Alternative PEMFC approaches including cell/stack constructions and air compressors</li><li>» Fuel cell vehicle hybridization</li></ul></li><li>◆ Other topics as the need arises</li></ul>

Our manufacturing cost estimation involves technology assessment, cost modeling, and industry inputs to calibrate our assumptions and findings.


*Performance/  
Tech Assessment*

- ◆ Literature Search
- ◆ Outline Assumptions
- ◆ System Design and Configurations
- ◆ Process Models
- ◆ Developer Input

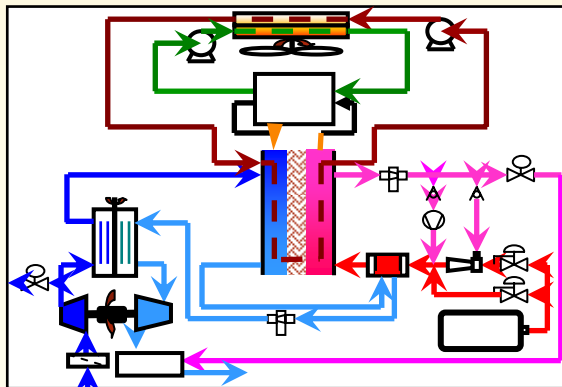


*Cost Modeling*

- ◆ Document Bill of Materials (BOM)
- ◆ Determine Material Costs
- ◆ Identify Processes and Mnf. Equipment
- ◆ Sensitivity Analyses

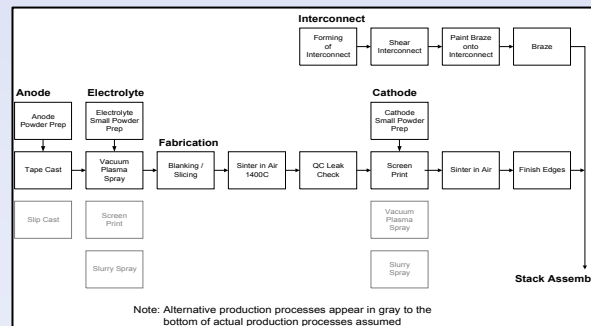

*Overall Model Refinement*

- ◆ Developer and Industry Feedback
- ◆ Revise Assumptions and Model Inputs

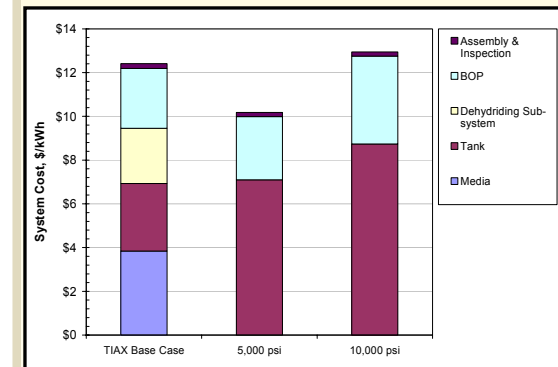

**We will primarily use a bottom-up approach to determine the impact of production volume on manufacturing cost.**

### ***Two General Approaches:***

#### **◆ *Bottom-Up Manufacturing Process Methodology***

- » Based on impact of volume on material costs
- » Based on impact of volume on process type, equipment, and level of automation
- » Use for major stack cost contributors and critical processes
- » Use Boothroyd Dewhurst Design for Manufacturing (DFM<sup>®</sup>) software for BOP components cost estimation, such as the compressor expander, RH control devices, heater exchangers, etc.

---

#### **◆ *Experience Based Methodology***


- » Based on “learning curves” and/or comparison with similar products
- » Use for lesser cost contributors, e.g., sensors, controllers, ....

**The DOE has requested costs for production volumes of 100 units/year for 4 years, 30K/yr, 80K/yr, 130K/yr, and then 500K/yr.**

**We will consider materials and BOP components on a case by case basis for their manufacturing maturity and our approach to scaling their cost.**


<b>Materials</b> (membranes, GDL, bipolar plates, Pt,...)		<b>BOP Components</b> (Mechanical, Heat Exchangers, RH, ...)
<b>Available Now</b>	<b>New Materials</b>	<b>Approach to be Selected Component by Component</b>
<b>Volume or Commodity Pricing Available</b>	<b>Scale Up Production</b>	
<b>Vendor Discussions and/or Experience</b>	<b>Bottom-Up Costing</b>	

We will use cost versus volume curves from three production volume scenarios to define an integrated scenario.

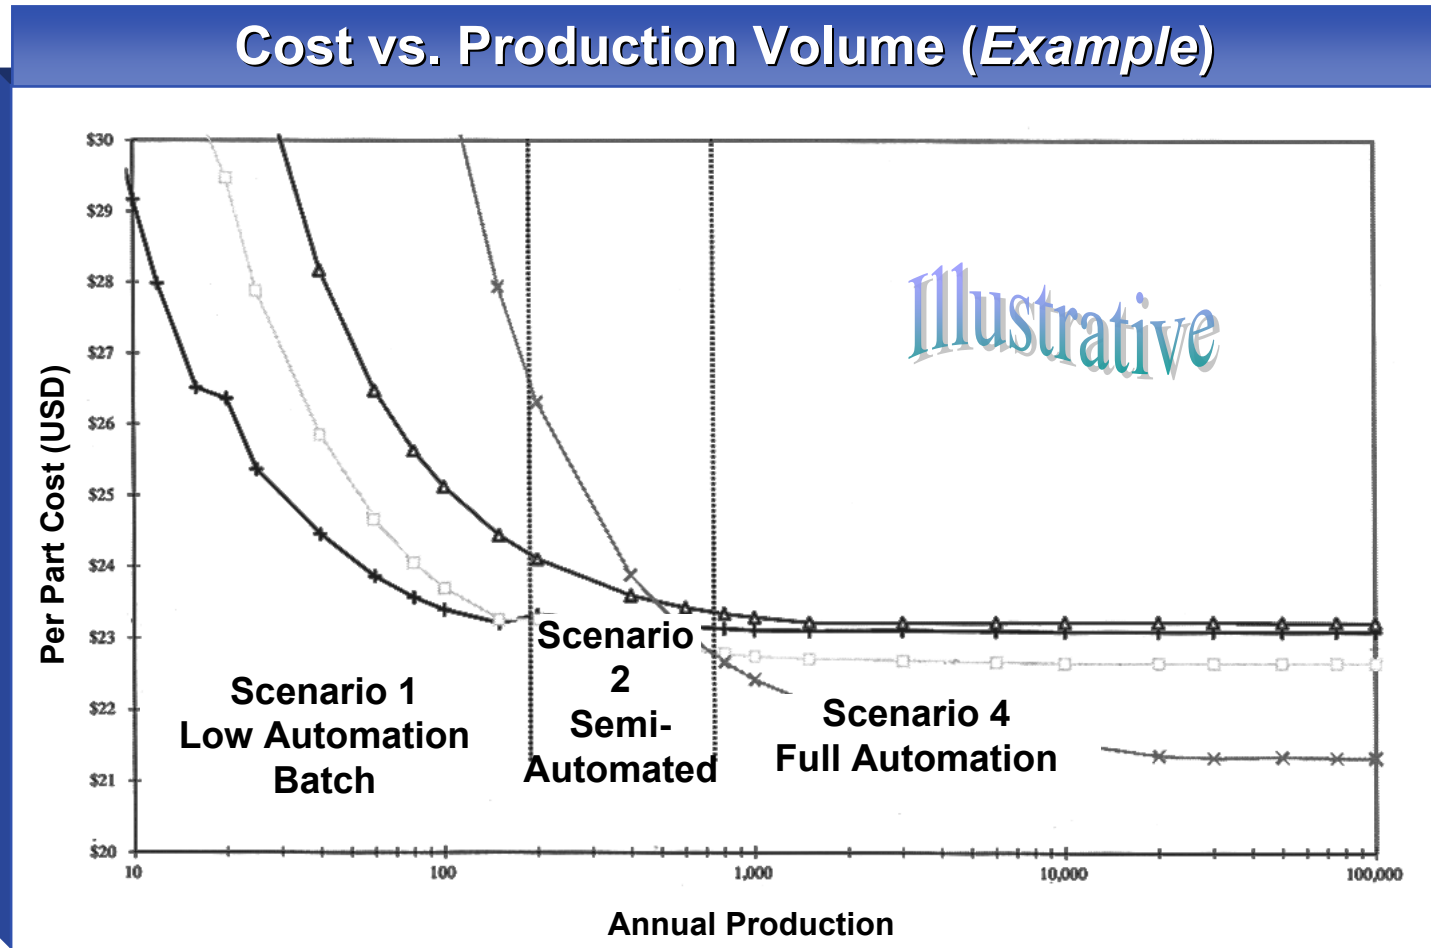

The reduction in process costs was the primary driver for the economies of scale. Higher equipment utilization led to lower capital costs.

**SOFC Stack Cost versus Production Volume\***

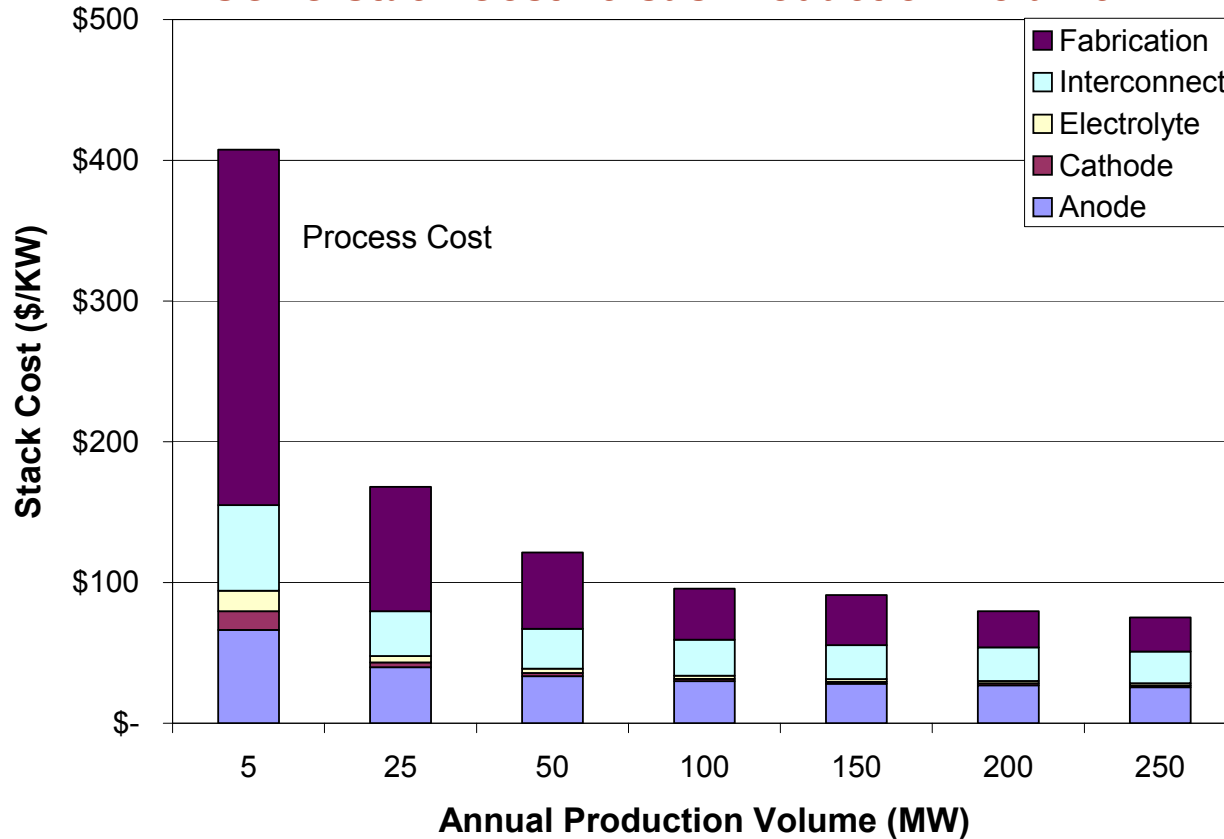

1,000 Stacks

10,000 Stacks



50,000 Stacks

	5 MW	250 MW	Delta
<b>Material</b>	\$73	\$56	1.3x
<b>Process</b>	\$385	\$36	10.7x

\* E Carlson, et.al., "Solid Oxide Fuel Cell Manufacturing Cost Model: Simulating Relationships between Performance, Manufacturing, and Cost of Production", National Energy Technology Laboratory (DOE), April 20, 2004, DOE Contract # DE-FC26-02NT41568




The 2005 update\* of the cost projection for PEMFC technology will be used as a baseline for the economies of scale analysis.

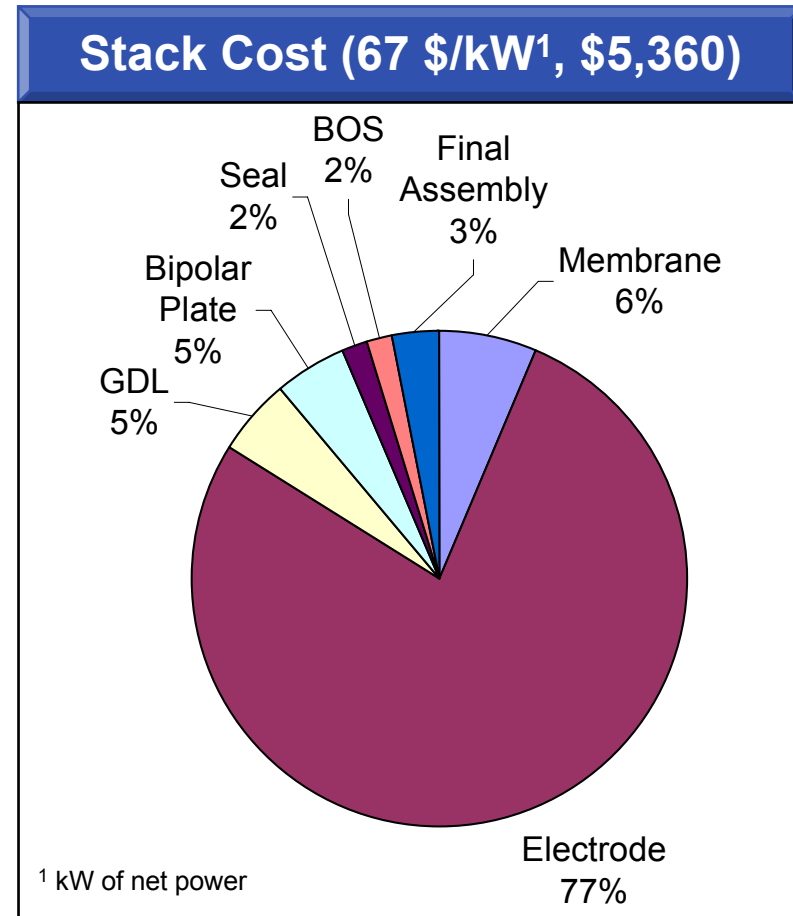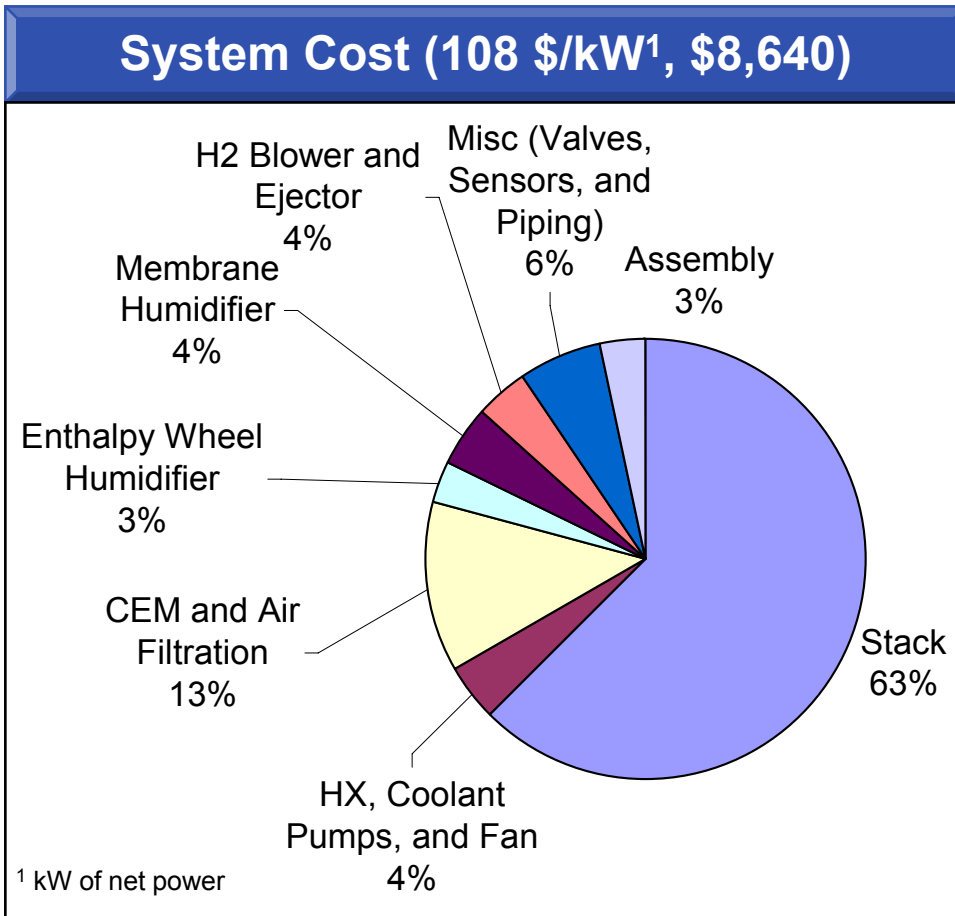

\* E Carlson, et.al., "Cost Analysis of PEM Fuel Cell Systems for Transportation", National Renewable Energy Laboratory (DOE), September 30, 2005, Subcontract Report NREL/SR-560-39104 (December 2005)

**Our economies of scale analysis will only consider factory cost, consequently, the results will not be comparable with fuel cell prices.**

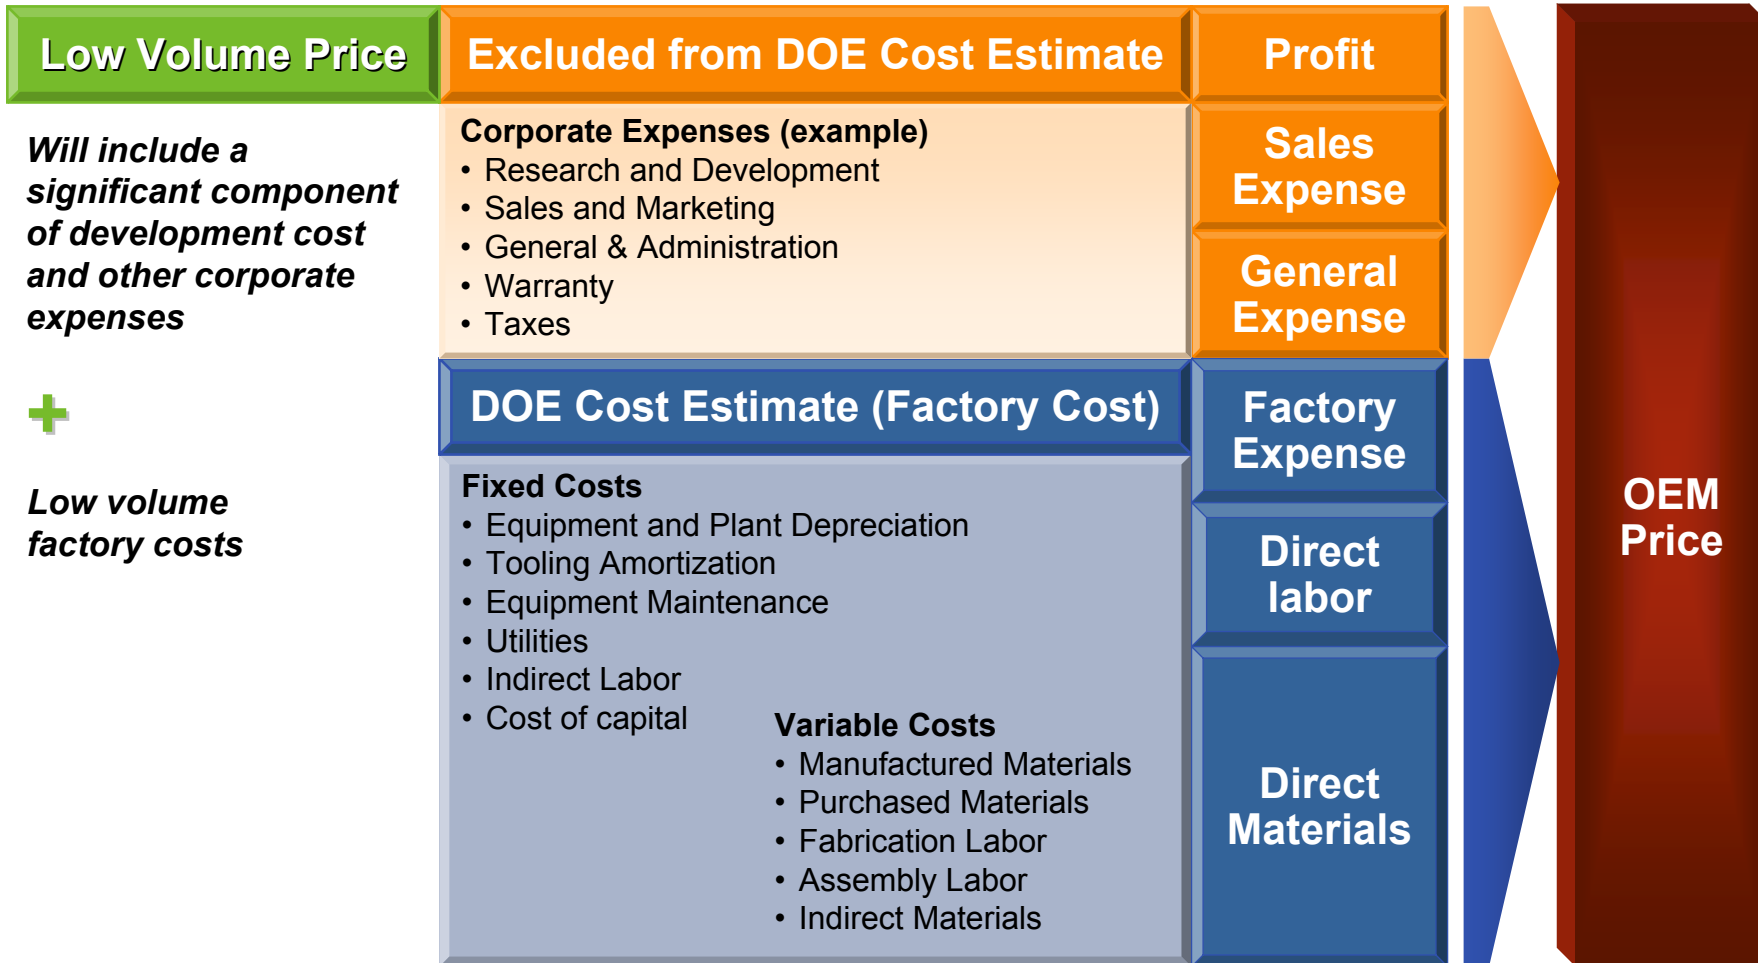


**Stack components, because of their large number and compatibility with continuous processes, will realize economies of scale sooner than BOP components.**

High Part Count Components	Low Part Count Components
<ul style="list-style-type: none"> <li>◆ <b>Stack unit cells (e.g., 450 per stack)</b> <ul style="list-style-type: none"> <li>» Individual layers (membrane, GDL, electrodes) amenable to continuous processes</li> <li>» Bipolar plates automated molding methods</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>◆ <b>Stack hardware</b> <ul style="list-style-type: none"> <li>» End-plates (2/stack – 4/system), bolts (8/system), manifold (1/system), enclosure (1/system)</li> </ul> </li> <li>◆ <b>Balance-of-Plant (Individual Components)</b> <ul style="list-style-type: none"> <li>» Heat exchangers (&lt;5 pieces per system)</li> <li>» Air management (1 per system)</li> <li>» RH management (several technologies but only 1 component)</li> <li>» H<sub>2</sub> recirculation loop (e.g., blower, ejectors)</li> <li>» Controls, sensors, ....</li> </ul> </li> </ul>

**Approximately 46% of the 2005 high volume cost comes from Pt commodity cost and will not be subject to economies of scale.**





2005 Key Assumptions		
Power density	mW/cm <sup>2</sup>	600
Cell voltage	V	0.65
Net power	kW <sub>e</sub>	80
Gross power	kW <sub>e</sub>	90
Production volume	units/yr	500,000
Pt cost	\$/g (\$/troz)	29 (900)
Pt loading	mg/cm <sup>2</sup>	0.75
Stack Quality Control (QC) and conditioning <b>not included</b>		

**Fuel Cell System Cost—80 kW Direct H<sub>2</sub> (108 \$/kW<sup>1</sup>, \$8,640)**

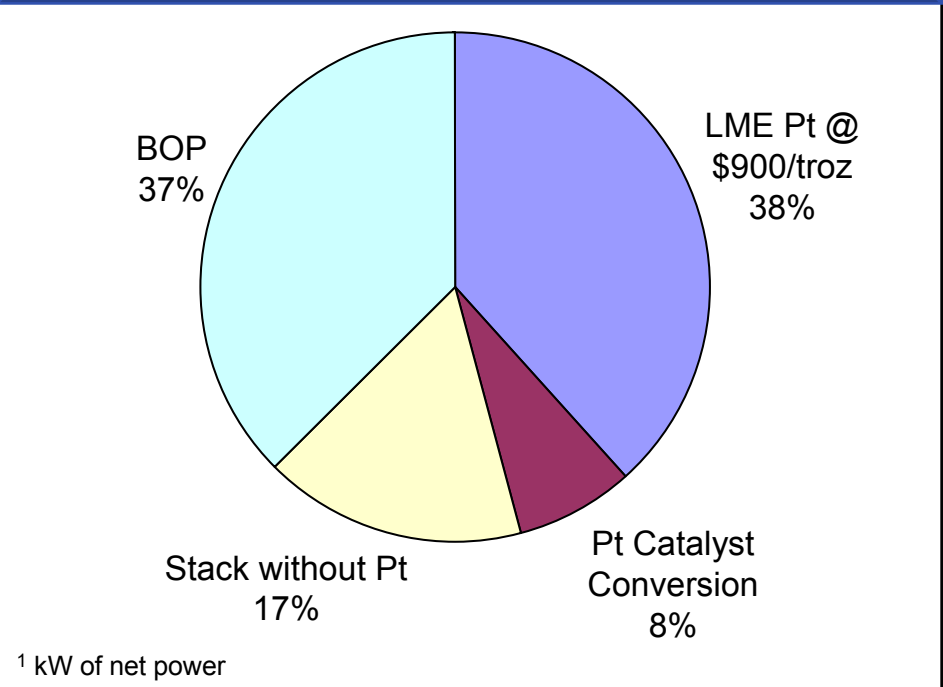

**However, with time performance improvements will lower the grams Pt/kW<sub>net</sub> over time.**

**With the exception of heat exchangers, the BOP components have not been made at high volumes.**

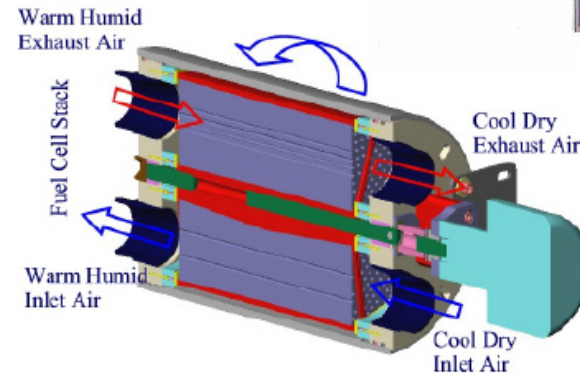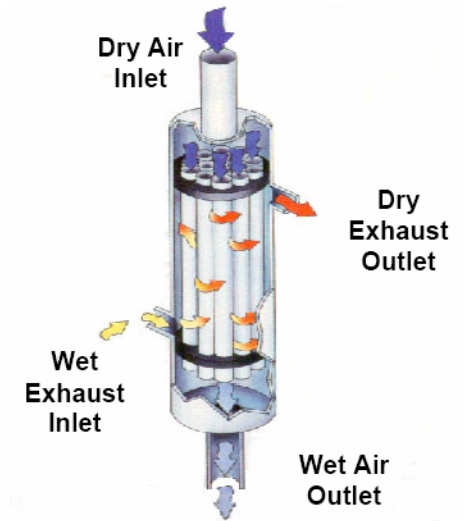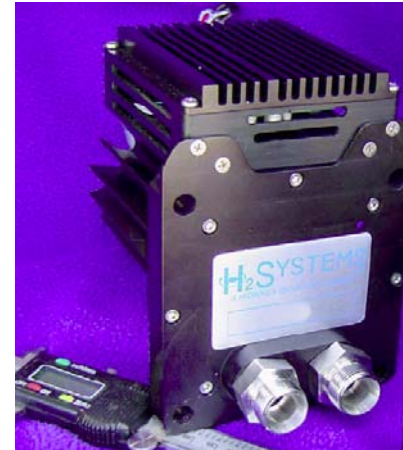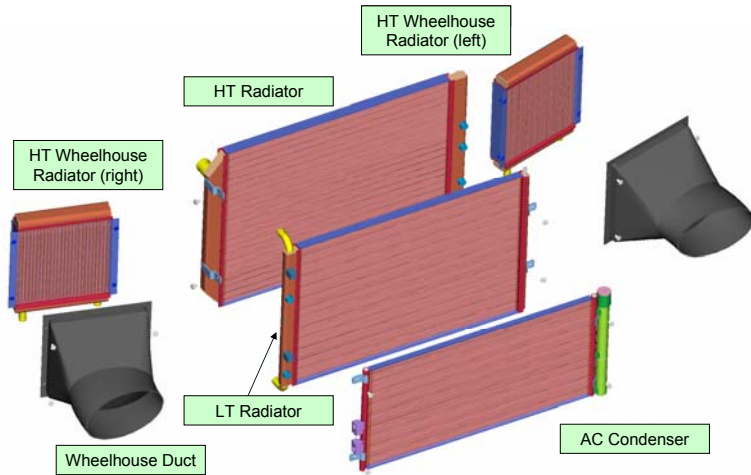

**Technology advances such as high temperature membranes could simplify the RH components and reduce the size of the heat exchangers.**

**Stack conditioning and final quality checks could be significant cost contributors at low volumes.**

- ◆ **Example: Assumptions**
  - » **Capital cost for a test station is \$200,000**
  - » **Labor is 0.2 per station**
  - » **Yield is 100%**
  - » **Up-time is 80%**
  - » **Does not include consumables such as H<sub>2</sub> or credit for the power**
  - » **Production volume: 500,000 units/year**
- ◆ **For reference, stack cost is 361 \$/m<sup>2</sup>**

	<b>2 Hours Stack Conditioning</b>	<b>24 Hours Stack Conditioning</b>
<b># of test stations</b>	521	6,250
<b># of stacks per day</b>	4168	4168
<b>Total equipment cost</b>	\$104 Million	\$1,250 Million
<b>Cost (\$/m<sup>2</sup>)</b>	9.01	108.10

**Testing of the complete system with BOP would represent an additional cost.**

